STI Global Reset

ABORT

**GAS
SHUT OFF**

TO ACTIVATE
LIFT COVER PRESS GLASS

KEY FEATURES

General Information

· Resettable call point simulates break glass activation with no broken glass while offering the user the benefits and environmental advantages of a resettable element.
· Three year guarantee against breakage of polycarbonate in normal use (one year on electromechanical and electronic components).

Design

· An indicator drops into view at the top of the window upon activation. The unit simply resets with a key and is immediately ready for re-use.

Construction

· Extremely attractive, high value look and feel: glass appearance maintains operator deterrence, while a visible warning flag confirms activation.

Installation

· Easy installation with no glass elements that could be broken or incorrectly fitted.
· Versatile mounting plate fits U.S., European, double-gang and single-gang mounting box.

Options

· Five colours available.
· Standard or custom activation labelling.

PRODUCT OVERVIEW

The Global ReSet is a unique resettable call point that simulates break glass activation with no broken glass. It is safe to use in areas where glass cannot be used such as food processing plants and common areas. As the units can be simply reset with a key, they provide an ideal solution for locations that suffer from a high number of false activations such as schools, shopping centres and public areas.

HOW IT WORKS

The 'ReSet' uses a simple yet ingenious patented mechanism which consists of a rigid plastic operating element and an over the center spring mechanism. This arrangement provides the feel of real action on operation and simulates break glass activation. Global ReSet is a single-action non-coded initiating station. The signal is activated by pushing the clear operating plate (indicated by the arrows and hand symbol). Once activated, a yellow and black warning flag drops into view. To reset, a special key is inserted into a hole in the bottom and rotated. This eliminates the maintenance requirement to replace broken glass.

STI Global Reset

Dimensions and Technical Information

FIRE MODELS AVAILABLE

Red Global Reset - 'House Flame' logo, with Shield
GR-RF-21   Flush mount, Series 01 Electrical Arrangement
GR-RF-22   Flush mount, Series 02 Electrical Arrangement
GR-RS-21   Surface mount, Series 01 Electrical Arrangement
GR-RS-22   Surface mount, Series 02 Electrical Arrangement

Red Global Reset - 'House Flame' logo, without Shield
GR-RF-21-0   Flush mount, Series 01 Electrical Arrangement
GR-RF-22-0   Flush mount, Series 02 Electrical Arrangement
GR-RS-21-0   Surface mount, Series 01 Electrical Arrangement
GR-RS-22-0   Surface mount, Series 02 Electrical Arrangement

For 'FIRE' text label alternative to House Flame Logo:
Add -EN for English, -ES for Spanish, -FR for French

Series 01 = European Conventional PCB with Resistors
Series 02 = Single Pole Changeover

BUILD YOUR OWN MODEL

GLR _ _ _ – _

Colour
0 - Red (non FIRE models)
1 - Green
2 - Yellow
3 - White
4 - Blue

Cover
01 - No cover
21 - Shield

Message/Text
AB - ABORT
EM - EMERGENCY
EX - EMERGENCY EXIT
PO - EMERGENCY POWER OFF
ES - EMERGENCY STOP
EV - EVACUATION
XT - EXIT
PS - FUEL PUMP SHUT-DOWN
HV - HVAV SHUT-DOWN
LD - LOCKDOWN
PX - PUSH TO EXIT
NT - No Text
ZA - Custom Label (Default white or black text)
RM - Running Man Logo

Language
EN - English
ES - Spanish
FR - French
ZL - Other Language

Custom Text Options - 1 Line, 13 Characters Maximum. 2 Lines, 20 Characters each (including spaces)

APPROVALS & WARRANTY

Testing
It has been tested and approved or listed by:
• Underwriter Laboratories File No. S2466
• Canadian Underwriter Laboratories Issue File No. S2466

Accessories:

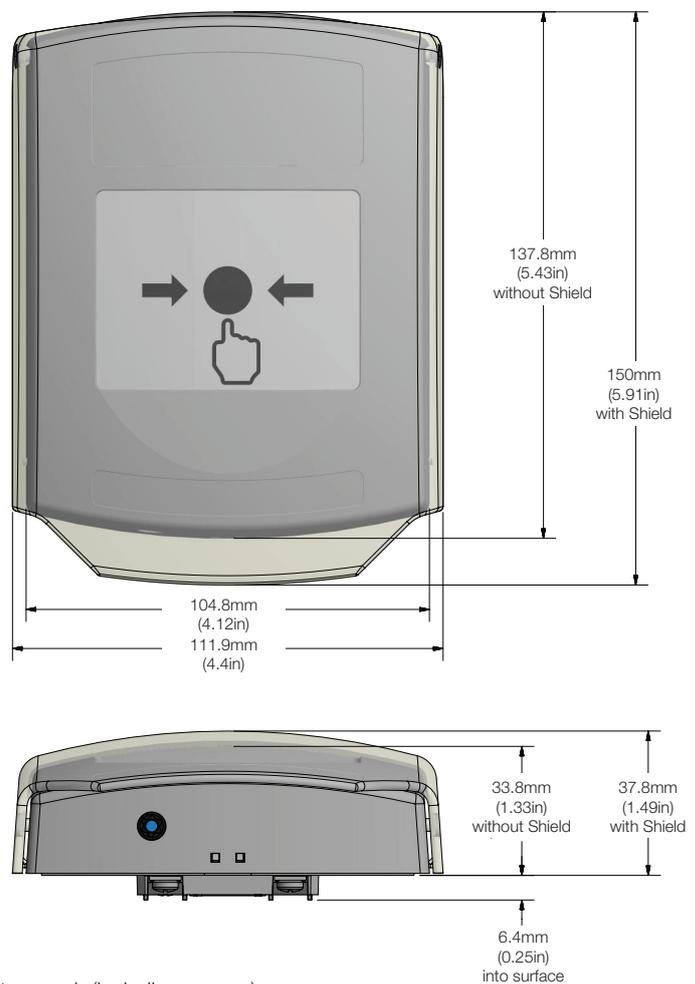|	
KIT-GLR-BB-*	GLR Backbox kit with ½" (12.7mm) NPT Plug. *Choose colour option: -0 = Red, -1 = Green, -2 = Yellow, -3 = White, -4 = Blue
KIT-GLR-NPT-*	GLR ½" (12.7mm) NPT Plug. *Choose colour option: -0 = Red , -1 = Green, -2 = Yellow, -3 = White, -4 = Blue
KIT-GLR-K2	Global ReSet Key 2 Pack
KIT-GLR-K10	Global ReSet Key 10 Pack
KIT-GLR-A	Audio/Visual Tamper Alert Add-On Kit
KIT-GLR-S-EN	English Global ReSet Shield
KIT-GLR-S-ES	Spanish Global ReSet Shield
KIT-GLR-S-FR	French Global ReSet Shield

137.8mm (5.43in) without Shield
150mm (5.91in) with Shield
104.8mm (4.12in)
111.9mm (4.4in)
33.8mm (1.33in) without Shield
37.8mm (1.49in) with Shield
6.4mm (0.25in) into surface