
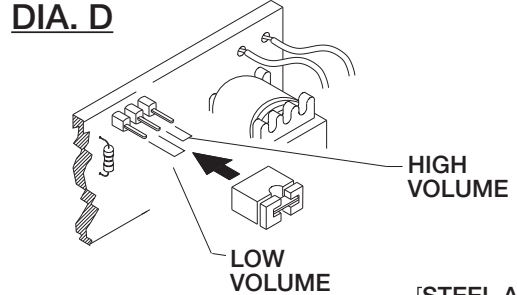
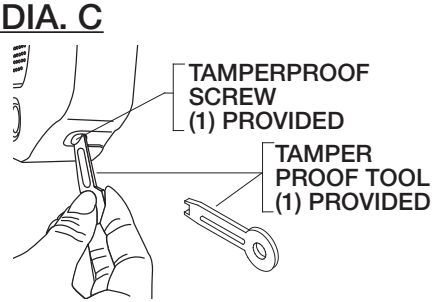
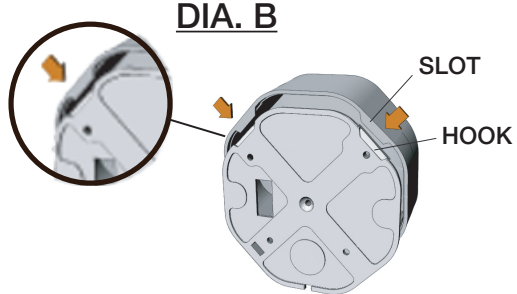


EQUIPMENT THEFT STOPPER

This sturdy, tamper-proof, self-contained device helps prevent the theft, misuse or vandalism of evacuation chairs, fire extinguishers or other free standing equipment. Experience has shown its highly visible 'stop sign' design is itself an effective deterrent. The device contains a 9 vdc battery, a piercing alarm and a unique patented steel-cable-operated switch mechanism. When installing, the steel cable is inserted into the unit, when the equipment is removed and the steel cable is pulled out, the alarm sounds. Re-inserting the cable silences the alarm and re-activates the device. An ON/OFF keyswitch can be used to silence the alarm by authorised personal.

Installation Data for STI-6200/KS/CHR

1. Select the appropriate position for mounting the Equipment Theft Stopper so that the cable can be crimped around a secure section of the equipment to be protected. Ensure the positioning does not obstruct the access of the equipment if required in an emergency.
2. Remove the cover from the unit using the tamper tool provided. At this point do not remove the deactivation cable supplied with the unit.
3. Mark the fixing positions using the base as a template (See Dia. A adjacent).
4. Secure the base into position using the 2 fixings provided. (See Dia. A for recommendation*)
5. Disconnect the battery and remove the deactivation cable. Insert one end of the operating cable into the alarm unit, reconnect the battery and replace cover.
6. To fix the cover to the base, hooks can be found on the inside top edge of the cover. Insert the hooks into the slots provided on the edge of the base (See Dia. B adjacent) and snap the cover down until it clicks into place. Using the tamper tool provided insert and tighten the screw to secure the cover to the base (See Dia. C adjacent).
7. Place the operating cable around the secure section of the equipment and crimp aluminium seal using large pliers. Ensure that the operating cable does not interfere with the equipment.
8. Ensure that the deactivation cable is retained for when the equipment needs to be serviced.



To Service The Equipment

Remove the cover using the Tamper Key provided and disconnect the battery. Remove the operating cable from the alarm unit and replace with deactivation cable. If the equipment is being replaced a new operating cable should be fitted, order Part No. STI-6205.


To Change Battery

Remove the alarm unit cover using Tamper Key supplied. Slide battery from holder, unsnap connector and discard. Replace with equivalent 9 volt battery (STI Part No. BAT9VDC) and replace cover.

To Change Sounder Volume

The switch on the PCB is used to change the sounder output from high to low volume, please refer to picture opposite.

STEEL ACTIVATION CABLE REPLACEMENT PART NO. STI-6205

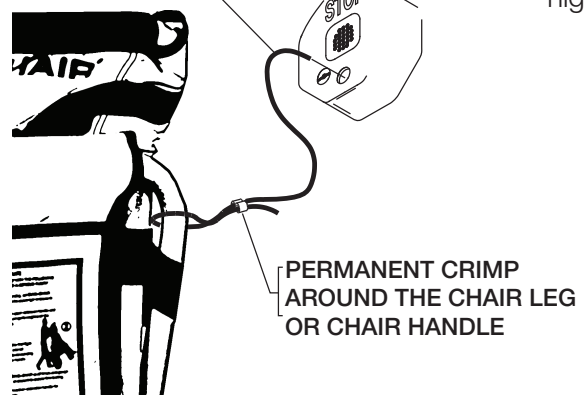

| Spares | |
|-----------------|-----------------------|
| STI-6204 | Service Cable |
| STI-6205 | Operating Cable Kit |
| STI-6206 | Operating Cable Crimp |
| F021 | Tamper Key |
| BAT9VDC | 9V Alkaline Battery |

Safety Technology International
 Taylor House, 34 Sherwood Road, Bromsgrove
 Worcestershire, B60 3DR, England
 Telephone: +44 (0)1527 520 999
 Fax: +44 (0) 1527 501 999
 E mail: info@sti-emea.com Web: www.sti-emea.com

ID6200/KS/CHR • Revised 01/17-053 • Printed in England